


Design by Big-Game



TECHNICAL SHEET

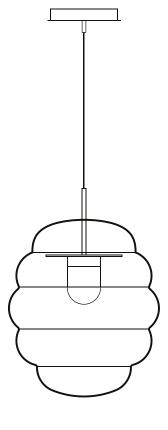

bomma.cz

BLIMP pendant medium

Design by Big-Game All Bomma products are hand-made from mouth-blown lead-free crystal. Therefore any small bubbles, non-melts and irregularities in the glass are both proof and a characteristic feature of this traditional craft.



Size dia. 450 mm, H 620 mm dia. 17,7 inch, H 24,4 inch Cable black textile braid cable 2,5 m / 98,4 inch Weigh 16,5 kg / 36,3 lb Material mouth-blown lead-free crystal in clear and amber Mounting Materials aluminium black elox / steel with black powder coating Mounting Colors black Protection IP 20 Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA) Class I. EU / I. USA		
Cable black textile braid cable 2,5 m / 98,4 inch Weigh 16,5 kg / 36,3 lb Material mouth-blown lead-free crystal in clear and amber Mounting Materials aluminium black elox / steel with black powder coating Mounting Colors black Protection IP 20 Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA)	Size	dia. 450 mm, H 620 mm
Weigh 16,5 kg / 36,3 lb Material mouth-blown lead-free crystal in clear and amber Mounting Materials aluminium black elox / steel with black powder coating Mounting Colors black Protection IP 20 Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA)		dia. 17,7 inch, H 24,4 inch
Material mouth-blown lead-free crystal in clear and amber Mounting Materials aluminium black elox / steel with black powder coating Mounting Colors black Protection IP 20 Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA)	Cable	black textile braid cable 2,5 m / 98,4 inch
Material in clear and amber Mounting Materials aluminium black elox / steel with black powder coating Mounting Colors black Protection IP 20 Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA)	Weigh	16,5 kg / 36,3 lb
Mounting Materials steel with black powder coating Mounting Colors black Protection IP 20 Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA)	Material	
Protection IP 20 Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA)	Mounting Materials	
Nominal voltage 220-230V / A.C. 50-60 hz (EU) 100-120 V / A.C. 60 Hz (USA)	Mounting Colors	black
100-120 V / A.C. 60 Hz (USA)	Protection	IP 20
	Nominal voltage	220-230V / A.C. 50-60 hz (EU)
Class I. EU / I. USA		100-120 V / A.C. 60 Hz (USA)
	Class	I. EU / I. USA

LIGHT SOURCE

LED module 24,5W, 2450Im
custom LED module
200-240V, AC 100-140V, AC
2700 K
RA 90+
Dimmable with TRIAC dimmers

TRANSFORMER

Mean Well PCD-40-700B EU ERP ESM030W-0700-42 USA

PACKAGING

Material	Cardboard
Size	660 × 660 × 780 mm
	26 × 26 × 30.7 inch

Origin: traditionally produced in the Czech Republic Intellectual property license holder: Bomma Czech Republic (EU) Represented by BMRC group s.r.o.



