

FLOS

F0031009 White

2620

Designed by Ron Gilad, 2013

170W - N/Dlm - 3000K - CRI> 90

Hanging lamp with indirect light. Stem and rings are in aluminium. The diffuser is in double satinized methacrylate. The power cable and the steel cable are 4 metres long. The power supply can be dimmed. The ceiling rose is covered with a mirrored disc.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607013052
Mounting	Suspension
Environment	Indoor dry location
Light source type	LED
LED type	LED Module
Lamp holder	LED Module
Power (W)	170
System flux (lm)	N/D

Physical

Colour	White
Cord length (mm)	4000
Net weight (kg)	18.4
Package height (cm)	64
Package width (cm)	80
Package length (cm)	120
Package volume (m3)	0.61
IP	20
IP external	20

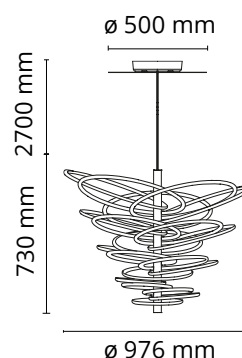

Download

Mounting instructions [Download PDF](#)

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)

Technical Drawings

2D [Download ZIP](#)



Photometric


Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Driver	Integrated
Dimming type	Dimmable
Cord length (mm)	4000
Batteries inside	No
Charging min time	No

Ecodesign and Energy
Labelling

This product contains a light
source of energy efficiency
class G



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional