

# FLOS


F1836044 Anodized Champagne

## Coordinates Ceiling 2 CLIII

Designed by Michael Anastassiades, 2020

61W - 3660lm - 2700K - CRI > 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 3 ceiling models (C1 – C2 – C4), which may be combined with the respective Long versions for the highest ceilings (C1 Long, C2 Long, C4 Long). The 'C Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

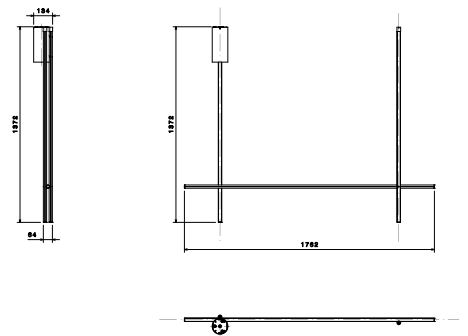

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607033180
Mounting	Ceiling
Environment	Indoor dry location
Light source type	LED
LED type	LED Module
Lamp holder	LED Module
Power (W)	61
Source flux (lm)	3660lm
System flux (lm)	3660

### Physical

Colour	Anodized Champagne
Length (mm)	1762
Net weight (kg)	2.2
Package volume (m3)	0.02
IP	20
IP external	20

### Download

[Mounting instructions](#)  PDF

### Photometric Files

[ULD](#)  ZIP


### Technical Drawings

[3D](#)  ZIP

### Ecodesign and Energy

#### Labelling


This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



## Schematic light drawing



Luminous flux luminaire  
591 lm

The above drawing is for illustrative purposes only and refers to product code:  
ASS\_ASTA\_COORDINATES\_780\_10,6W\_LED

## Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95

## Electrical

Insulation class	III
Main voltage (Vac)	48
Batteries inside	No

## Accessories & Power Supply



OPTIONAL

RF26994

DIMMER LED 12-48V

2AMDI511VPVRDS-1 UL NECTO

GR.



OPTIONAL

RF29209

AL.EL.100-240Vac 48V 3.9A 185W

MW HLG-185H-48A