

FLOS


F1838033 Argent

Coordinates Ceiling 4 Long CL III

Designed by Michael Anastassiades, 2020

174W - 10450lm - 2700K - CRI > 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 3 ceiling models (C1 – C2 – C4), which may be combined with the respective Long versions for the highest ceilings (C1 Long, C2 Long, C4 Long). The 'C Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

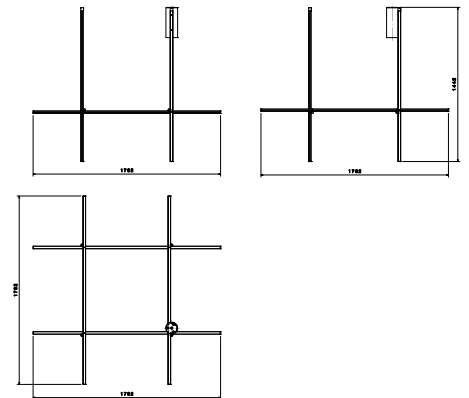

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)


Main specifications

EAN	8059607038291
Mounting	Ceiling
Environment	Indoor dry location
Light source type	LED
LED type	LED Module
Lamp holder	LED Module
Power (W)	174
Source flux (lm)	10450
System flux (lm)	10450

Physical

Colour	Argent
Length (mm)	1762
Net weight (kg)	6.1
Package volume (m3)	0.05
IP	20
IP external	20

Download

[Mounting instructions](#)  PDF

Photometric Files


[ULD](#)  ZIP

Technical Drawings

[3D](#)  ZIP

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional

<https://professional.flos.com/en/global/product/coordinates-ceiling-4-long-cl-iii-f1838033/>

F1838033


©2022 Flos - P.IVA 00290820174 - 8/17/2022

professional.flos.com | info@flos.com 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.



Schematic light drawing



Luminous flux luminaire
591 lm

The above drawing is for illustrative purposes only and refers to product code:
ASS_ASTA_COORDINATES_780_10,6W_LED

Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95

Electrical

Insulation class	III
Main voltage (Vac)	48
Batteries inside	No

Accessories & Power Supply



OPTIONAL

RF26994

DIMMER LED 12-48V
2AMDI511VPVRDS-1 UL NECTO
GR.



OPTIONAL

RF27617

AL.EL.MEAN WELL 240W HLG-
240H-48