

FLOS

■ F0263000 Black

Noctambule Suspension 1 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019




36W - 1007lm - 2700K - CRI > 90

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

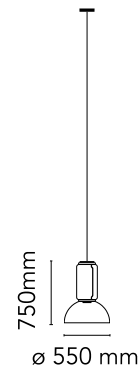

Main specifications

EAN	8059607000540
Mounting	Suspension
Environment	Indoor dry location
Light source type	LED
LED type	LED Module
Lamp holder	LED Module, COB LED
Power (W)	36
System flux (lm)	1007

Physical

Colour	Black
Cord length (mm)	4000
Net weight (kg)	10.7
Package volume (m3)	0.43
IP	20
IP external	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
----	-----------------------



Schematic light drawing



Luminous flux luminaire
286 lm

The above drawing is for
illustrative purposes only and
refers to product code:

F0254000_9W_LED_NOCTAMBULE_S_CYLINDER_H450

Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI >	90


Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Switch Integrated (Remote Dimmable)
Cord length (mm)	4000
Batteries inside	No
Charging min time	No


Ecodesign and Energy

Labelling

This product contains a light
source of energy efficiency
class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



F0253030A

Suspension attack



F0254000A

Noctambule Low Cylinder



F0255000A

Noctambule Bowl



RF0254100

Fixing screws kit



RF0410300

Led dimmer kit



RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF27422

Noctambule ceiling rose cover



RF27498

Ring led diffuser