

FLOS

F9705020 Grey

Pochette Up/Down Led

Designed by Rodolfo Dordoni, 2003




2 x 21.5W - 2 x 1744lm - 2700K - CRI > 90

Wall lamp providing direct/indirect light. Pressure die-cast Zamak alloy structure, matte gray, shiny white or chrome plated finish. Molded steel, galvanized white wall attachment containing the wall attachment system as well as the electrical devices.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

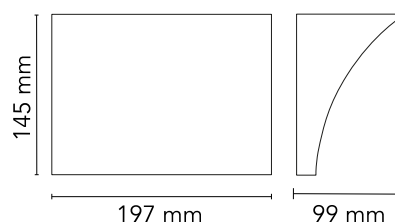

Main specifications

EAN	8059607024256
Mounting	Wall
Environment	Indoor dry location
Light source type	LED
LED type	LED Module
Lamp holder	LED Module
Number of heads	2
Power (W)	21.5
System flux (lm)	1744

Physical

Colour	Grey
Net weight (kg)	1.7
Package volume (m3)	0.01
IP	20
IP external	20

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Beam Angle: 107°

h(m)	E(lx)	D(m)
1	659	2.74
2	165	5.47
3	73	8.21
4	41	10.95
5	26	13.68

Luminous flux luminaire
1744 lm

The above drawing is for illustrative purposes only and refers to product code: F97050WPOCHETTE_LED_UP-DOWN_21,5W-LED

Photometric


Lighting type	Indirect, Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI >	90

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Driver	Integrated
Dimming type	Dimmable 1-10V
Batteries inside	No
Charging min time	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts



RF25062

Led power supply



RF25606

Up transparent diffuser