


SuperWire T

Designed by Formafantasma, 2024

18W - 1200lm - 2700K - CRI> 90



SuperWire is the first family of modular lamps designed by Formafantasma for Flos. A magical and poetic project, with an essential design but a great stage presence, which recalls the work of the great glass masters of the last century. Made of planar glass and polished aluminum, its design originated from the development of a custom-made light source that emits a warm and homogeneous light. Made up of one or more hexagons of planar glass connected by a polished aluminum element, SuperWire lights up its entire surface thanks to a new source developed by the Flos R&D team: a very thin, flat, soft, flexible LED strip measuring up to one meter, which emits a warm and homogeneous light along its entire length and which can be easily removed for replacement and repair, unique in the panorama of LED bulb-less lamps. This table version, consists of a single module h 45 cm, surmounted by a hexagonal glass cover.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607070222
Mounting	Table
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Filament LED
Power (W)	18
System power (W)	18
System flux (lm)	1200

Physical

Colour	Steel
Length (mm)	449
Cord colour	Clear
Cord length (mm)	2000
Net weight (kg)	9
Package volume (m3)	0.2
IP internal	20

Download

Mounting instructions

PDF

Photometric Files

ULD

ULD

LDT / IES

ZIP

Technical Drawings

2D

ZIP

3D

ZIP




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only) light source by an end-user



Replaceable control gear by an end-user

Schematic light drawing



Beam Angle:		
h(m)	E(lx)	D(m)
1	0	
2	0	
3	0	
4	0	
5	0	

Luminous flux luminaire
1200 lm


Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Dimmable
Dimming interface	Switch Integrated (Remote Dimmable)
Plug type	Type G, Type A, Type C
Batteries inside	No

Spare Parts

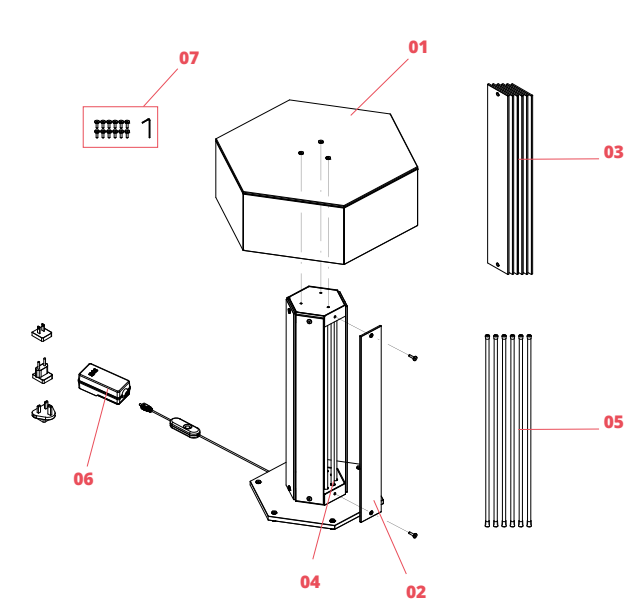

01.	Superwire T diffuser assembly	D301T04A0AASZ
02.	Superwire T short glass plate and bushings	RF301T400
03.	Superwire T short glass plates and bushings kit 6 pcs	RF301T500
04.	Superwire T Led L450 25MA/42VDC/27K filament	RF301T200
05.	Superwire T Led L450 25MA/42VDC/27K filament kit 6 pcs	RF301T300
06.	Black plug assembly kit & 48V driver	RF6600130
07.	Kit with special screws	RF301T100



D301T04A0AASZ
Superwire T diffuser assembly



RF301T400
Superwire T short glass plate and bushings



RF301T500
Superwire T short glass plates and bushings kit 6 pcs



RF301T200
Superwire T Led L450 25MA/42VDC/27K filament



RF301T300
Superwire T Led L450 25MA/42VDC/27K filament kit 6 pcs



RF6600130
Black plug assembly kit & 48V driver



RF301T100
Kit with special screws