

BIG

Design by Lievore Altherr Molina.

VIBIA

Reference

530.

Application

Ceiling Lamps

Installation type

Surface

Description

Accessible ceiling light for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome or matt white lacquer body and white opal methacrylate diffuser. Its large size makes it ideal for lighting large spaces from a single point.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Finish




0530-01 Chrome (Metallic finish)



0530-93 Matt white (RAL 9010)

Sketch

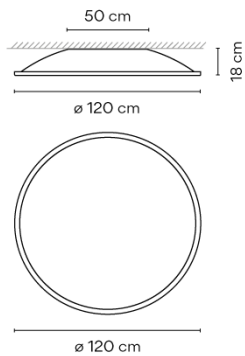

Electrical characteristics

2 x 2G11 230V 36W

AND

2 x 2G11 230V 24W

Total 120.0 W



Fixture: 5533 lm 46 lm/W

Driver included: 230V 50Hz

Electronic dimming DALI Push

Technical characteristics

- Dimmable electronic ballast.
- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.38 x 1.37 x 1.37 m. / Vol. 0.6925 m³ /
Gross weight 21.0 kg. / Net weight 18.9 kg.

Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 58.86%

Coordinate system : CG

Total flux : 9400.00 lm

Maximum value : 210.42 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

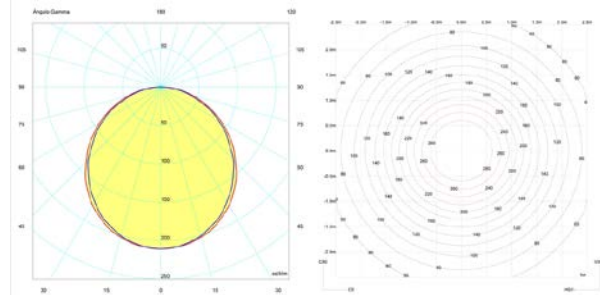

Certificates



BIG

Design by Lievore Altherr Molina.

VIBIA

Reference

531.

Application

Ceiling Lamps

Installation type

Surface

Description

Accessible ceiling light for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome or matt white lacquer body and white opal methacrylate diffuser. Its large size makes it ideal for lighting large spaces from a single point.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Finish




0531-01 Chrome (Metallic finish)



0531-93 Matt white (RAL 9010)

Sketch



Electrical characteristics

2 x 2G11 230V 36W

AND

2 x 2G11 230V 24W

Total 120.0 W



Fixture: 5286 lm 44 lm/W

Driver included: 230V 50Hz

Electronic dimming DALI Push

Technical characteristics

- Dimmable electronic ballast.
- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.34 x 1.14 x 1.14 m. / Vol. 0.4327 m³ /

Gross weight 15.2 kg. / Net weight 13.7 kg.

Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 45.57%

Coordinate system : CG

Total flux : 11600.00 lm

Maximum value : 154.53 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

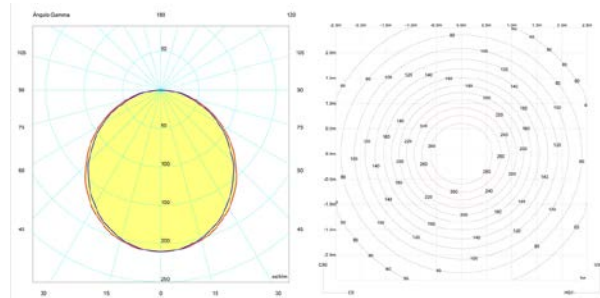

Certificates



BIG

Design by Lievore Altherr Molina.

VIBIA

Reference

532.

Application

Ceiling Lamps

Installation type

Surface

Description

Accessible ceiling light for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome or matt white lacquer body and white opal methacrylate diffuser. Its large size makes it ideal for lighting large spaces from a single point.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Finish




0532-01 Chrome (Metallic finish)



0532-93 Matt white (RAL 9010)

Sketch

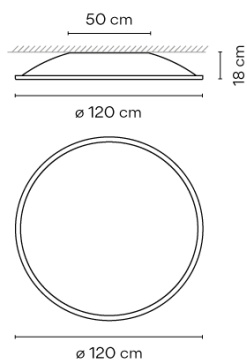

Electrical characteristics

4 x LED Quadrant 18,9W 500mA

Total 75.6 W



Light source: 3000K CRI >80 8944 lm 132 lm/W

Driver included: CC - Constant Current 500 mA 220-240V 50/60Hz

Electronic dimming 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional DALI or Casambi

Physical characteristics

1 Box / 0.38 x 1.37 x 1.37 m. / Vol. 0.6925 m³ /

Gross weight 21.0 kg. / Net weight 18.9 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 75.85%

Coordinate system : CG

Total flux : 8164.00 lm

Maximum value : 258.72 cd/klm

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates



BIG

Design by Lievore Altherr Molina.

Reference

533.

Application

Ceiling Lamps

Installation type

Surface

Description

Accessible ceiling light for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome or matt white lacquer body and white opal methacrylate diffuser. Its large size makes it ideal for lighting large spaces from a single point.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Finish




0533-01 Chrome (Metallic finish)



0533-93 Matt white (RAL 9010)

Sketch



Electrical characteristics

4 x LED Quadrant 18,9W 500mA

Total 75.6 W



VIBIA



Light source: 3000K CRI >80 8944 lm 132 lm/W

Driver included: CC - Constant Current 500 mA 220-240V 50/60Hz

Electronic dimming 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional DALI or Casambi

Physical characteristics

1 Box / 0.34 x 1.14 x 1.14 m. / Vol. 0.4327 m³ /

Gross weight 15.2 kg. / Net weight 13.7 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 72.86%

Coordinate system : CG

Total flux : 8164.00 lm

Maximum value : 248.13 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

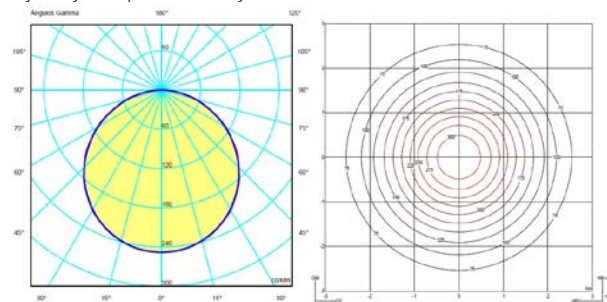

Certificates

