

BIG

Design by Lievore Altherr Molina.

VIBIA

Reference

535.

Application

Hanging lamps

Installation type

Surface

Description

Hanging lamp for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome or matt white lacquer body and white opal methacrylate diffuser with an opaque shade which therefore projects more light downwards.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Ceiling rose: Steel

Finish




0535-01 Chrome (RAL 9016)



0535-93 Matt white (RAL 9010)

Sketch



Electrical characteristics


2 x 2G11 230V 36W

AND

2 x 2G11 230V 24W

Total 120.0 W

A



Fixture: 5533 lm 46 lm/W

Driver included: 230V 50Hz

Electronic dimming DALI Push

Technical characteristics

- Dimmable electronic ballast.

- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.38 x 1.37 x 1.37 m. / Vol. 0.7080 m³ /

Gross weight 25.6 kg. / Net weight 23.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting - opaque shade

Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric data

Efficiency : 58.86%

Coordinate system : CG

Total flux : 9400.00 lm

Maximum value : 210.42 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

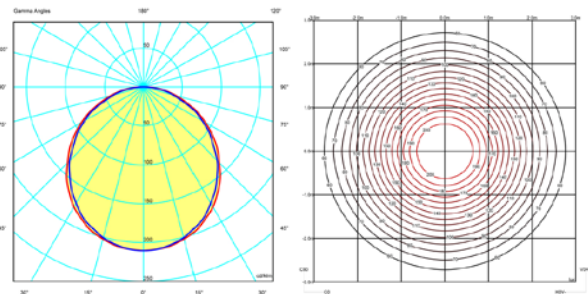

Certificates



BIG

Design by Lievore Altherr Molina.

VIBIA

Reference

536.

Application

Hanging lamps

Installation type

Surface

Description

Hanging lamp for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome and matt white lacquer body and white opal methacrylate diffuser with an opaque shade which therefore projects more light downwards.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Ceiling rose: Steel

Finish




0536-01 Chrome (Metallic finish)



0536-93 Matt white (RAL 9010)

Sketch



Electrical characteristics


2 x 2G11 230V 36W

AND

2 x 2G11 230V 24W

Total 120.0 W

A



Fixture: 4776 lm 40 lm/W

Driver included: 230V 50Hz

Electronic dimming DALI Push

Technical characteristics

- Dimmable electronic ballast.

- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.34 x 1.14 x 1.14 m. / Vol. 0.4327 m³ /

Gross weight 19.6 kg. / Net weight 17.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting - opaque shade

Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric data

Efficiency : 50.81%

Coordinate system : CG

Total flux : 9400.00 lm

Maximum value : 178.68 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

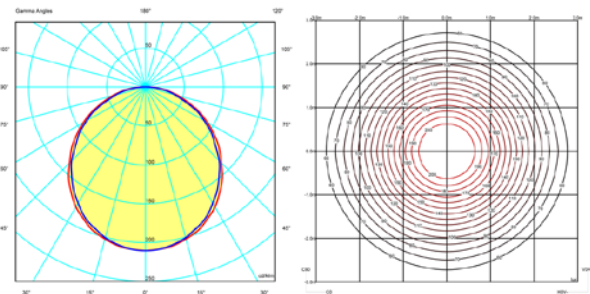

Certificates



BIG

Design by Lievore Altherr Molina.

VIBIA

Reference

537.

Application

Hanging lamps

Installation type

Surface

Description

Hanging lamp for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome or matt white lacquer body and white opal methacrylate diffuser with an opaque shade which therefore projects more light downwards.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Ceiling rose: Steel

Finish




0537-01 Chrome (Metallic finish)



0537-93 Matt white (RAL 9010)


Sketch



Electrical characteristics

4 x LED Quadrant 18,9W 500mA

Total 75.6 W



Light source: 3000K CRI >90 8944 lm 132 lm/W

Driver included: CC - Constant Current 500 mA 220-240V 50/60Hz

Electronic dimming 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional DALI or Casambi

Technical characteristics

- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.38 x 1.37 x 1.37 m. / Vol. 0.6925 m³ /

Gross weight 25.6 kg. / Net weight 23.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting - opaque shade

Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric data

Certificates



BIG

Design by Lievore Altherr Molina.

Reference

538.

Application

Hanging lamps

Installation type

Surface

Description

Hanging lamp for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse and uniform light distribution. Chrome and matt white lacquer body and white opal methacrylate diffuser with an opaque shade which therefore projects more light downwards.

Diffuser

Methacrylate diffuser

Materials

Shade: Aluminum

Diffuser: Methacrylate

Ring: Steel

Ceiling rose: Steel

Finish




0538-01 Chrome (Metallic finish)



0538-93 Matt white (RAL 9010)

Sketch




Electrical characteristics

4 x LED Quadrant 18,9W 500mA

Total 75.6 W



VIBIA



Light source: 3000K CRI >90 8944 lm 132 lm/W

Driver included: CC - Constant Current 500 mA 220-240V 50/60Hz

Electronic dimming 1-10V Push

ficha.fichatecnicaproducto.regulacion.opcional DALI or Casambi

Technical characteristics

- Easy-to-install and replace bulb system

Physical characteristics

1 Box / 0.34 x 1.14 x 1.14 m. / Vol. 0.4327 m³ /

Gross weight 19.6 kg. / Net weight 17.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting - opaque shade

Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric data

Efficiency : 72.86%

Coordinate system : CG

Total flux : 8164.00 lm

Maximum value : 248.13 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

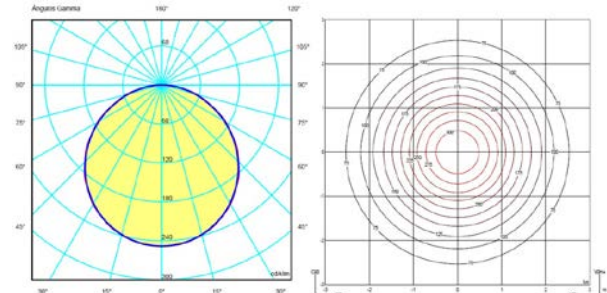

Certificates

