


Design By Lievore Altherr Molina

Pendant for indoor use, designed by Lievore, Altherr, Molina. Direct, diffuse, and uniform light distribution. Chrome body and white opal methacrylate diffuser with an opaque shade which therefore projects more light downwards.

### Spec sheet

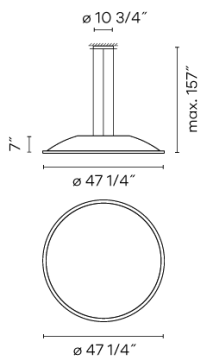

**Optional: Extra cable length**  
Min. Quantity, upcharge and extra lead time apply

<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: white; border-radius: 50%; margin-right: 5px;"></span> 93 White RAL 9010</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%; margin-right: 5px;"></span> 01 Chrome Chromeplated</li> </ul>
<b>LED color temperature</b>	3500 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Surface mounted

<b>Materials</b>	Shade: Aluminum Diffuser: Acrylic Ring: Steel Canopy: Steel
<b>Light source</b>	4 x LED Quadrant 18.9W 500mA A+
<b>LED</b>	CRI>90 8969.8 lm 118.65 3500 K
<b>Driver</b>	CC - Constant Current 500 120-277 V 50/60 HZ


Dimmable
LED
IP20
Multi-volt  
 Dry Location
50-60Hz
 0-10V

<b>Application</b>	Pendants
<b>Packaging</b>	1 Box 53.15 m x 53.15 m x 14.96 m Gross weight 56.39 Net weight 50.75 Vol. 24.4556

#### Lighting effect

##### General Lighting

Lamp for general lighting that equally distributes the light in all directions.



#### Photometric Data

<b>Efficiency</b>	70.01 lm/W
<b>Coordination System</b>	CG
<b>Total Flux</b>	5638.14 lm
<b>Maximum Value</b>	1897.01 cd