



Spec sheet

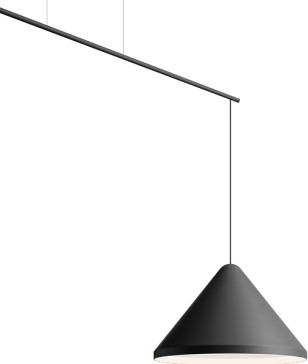

Optional: Extra cable length
Min. Quantity, upcharge and extra lead time apply

Finish	11 Black NCS S 8500N 10 White NCS S 0300-N 58 Cream NCS S2005-Y50R
LED color temperature	2700 K
Dimming	0-10V Optional DALI Min. Quantity, upcharge and extra lead time apply
Installation type	Surface mounted
Materials	Shade: Aluminum Canopy: Steel Cane: Carbon fiber Diffuser: Acrylic
Light source	1 x LED 9W 350mA A+
LED	CR>90 1041 lm 116 2700 K
Driver	CC - Constant Current 350 120~277 V 50/60 HZ
Remarks	Cable can be adjusted in the field. 157 max.
	F Dimmable LED IP20 Multi-volt UL Dry Location 50-60Hz 0-10V
Application	Pendants
Packaging	2 Box 21.14 m x 21.14 m x 14.17 m Gross weight 18.17 Net weight 6.61 Vol. 4.8064

Lighting effect	
General Lighting	Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.
Photometric Data	
Efficiency	72.81
Coordination System	CG
Total Flux	757.94 lm
Maximum Value	420.06 cd/klm