




2602

Design By Arik Levy

Wall light with basic cubic volumes that form sculptures integrated into the architecture. Aluminum body and Polycarbonate structure. Two grey finishes integrate with a room's architecture.

Spec sheet

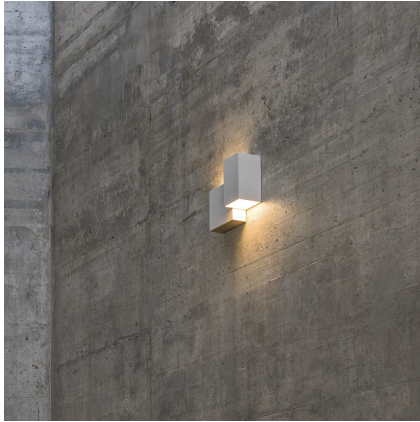

Finish	<ul style="list-style-type: none"> 21 Black Grey NCS S 7000-N 15 Grey L2 NCS S 2500-N
LED color temperature	3000 K
Dimming	0-10V Optional DALI Min. Quantity, upcharge and extra lead time apply
Installation type	Surface mounted

Materials	Body: Aluminum Diffuser: Polycarbonate Profile: Aluminum
Light source	2 x LED PLATE 24V 6W A
LED	CR>90 1416 lm 118 3000 K
Driver	CV - Constant Voltage [object Object] 110-277 V 50/60 HZ
Remarks	Only one main input by square box 16x16cm.

Dimmable
LED
IP20
Multi-volt
Dry Location
50-60Hz
0-10V

Lighting effect

General Lighting

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



Photometric Data

Efficiency	100.00%
Coordination System	CG
Total Flux	379.88 lm
Maximum Value	437.18 cd/klm

Application	Wall Fixtures
Packaging	1 Box 8.82 m x 12.8 m x 14.57 m Gross weight 5.95 Net weight 4.19 Vol. 0.95