
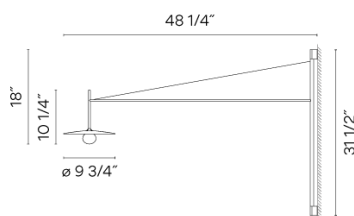


5757

Design By Lievore Altherr

Wall lamp. An adjustable rod emerges from the base attached to the wall, with blown glass diffuser and a tensing cable that permits precise adjustment of the height of the glass tulip. Connection without a plug. LED light source.

Spec sheet

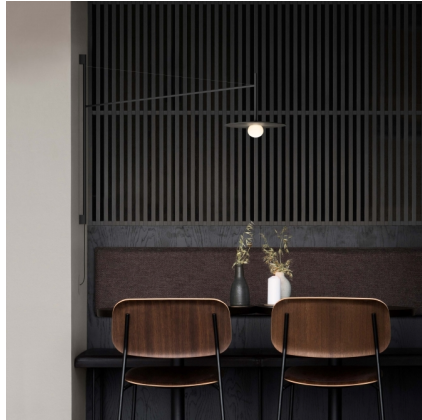

Finish	<ul style="list-style-type: none"> 62 Green NCS S 3010-G20Y 18 Graphite ADAPTA RF 9913 WX 37 Terra Red NCS S 4040-Y70R
LED color temperature	2700 K
Dimming	0-10V Optional DALI or TRIAC Min. Quantity, upcharge and extra lead time apply
Installation type	Recessed

Materials	Body: Steel Diffuser: Blown-glass LED support: Aluminum
Light source	1 x LED 4W 350mA A++
LED	CR>90 440.81 lm 110 2700 K
Driver	CC - Constant Current 350 120-277 V 50/60 HZ
Remarks	Recessed

Dimmable
LED
IP20
Multi-volt

 Dry Location

50-60Hz


 0-10V

Application	Wall Fixtures
Packaging	3 Box 33.78 m x 46.46 m x 2.83 m Gross weight 14.76 Net weight 9.47 Vol. 3.3125

Lighting effect

General Lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Efficiency	100%
Coordination System	CG
Total Flux	301.62 lm
Maximum Value	235.37 cd