


5761

Design By Lieve Altherr

Wall lamp. An adjustable rod emerges from the base attached to the wall, with blown glass diffuser and a tensing cable that permits precise adjustment of the height of the glass tulip. Connection without a plug. LED light source.

## Spec sheet

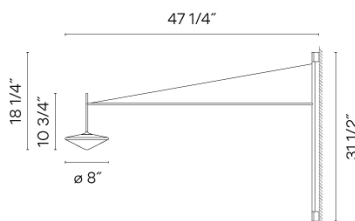

<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8bc34a; border-radius: 50%; margin-right: 5px;"></span> 62 Green NCS S 3010-G20Y</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #424242; border-radius: 50%; margin-right: 5px;"></span> 18 Graphite ADAPTA RF 9913 WX</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #c0392b; border-radius: 50%; margin-right: 5px;"></span> 37 Terra Red NCS S 4040-Y70R</li> </ul>
<b>LED color temperature</b>	2700 K
<b>Dimming</b>	0-10V <b>Optional</b> DALI or TRIAC Min. Quantity, upcharge and extra lead time apply
<b>Installation type</b>	Recessed

<b>Materials</b>	Body: Steel Diffuser: Blown-glass LED support: Aluminum
<b>Light source</b>	1 x LED 4W 350mA A++
<b>LED</b>	CRI>90 440.81 lm 110 2700 K
<b>Driver</b>	CC - Constant Current 350 120-277 V 50/60 HZ
<b>Remarks</b>	Recessed


Dimmable
  LED
  IP20
  Multi-volt  
 Dry Location
  50-60Hz
  0-10V

<b>Application</b>	Wall Fixtures
<b>Packaging</b>	3 Box 33.78 m x 46.46 m x 2.83 m Gross weight 13.44 Net weight 8.15 Vol. 3.2878

**Lighting effect**

**General Lighting**

Lamp for general lighting that equally distributes the light in all directions.



<b>Photometric Data</b>	
<b>Efficiency</b>	100%
<b>Coordination System</b>	CG
<b>Total Flux</b>	302.04 lm
<b>Maximum Value</b>	203.44 cd